


AERODROME GROUND MOVEMENT AND PARKING CHART - ICAO

APRON ELEV 1250FT (381m)

TWR 127.1

ZHEZKAZGAN

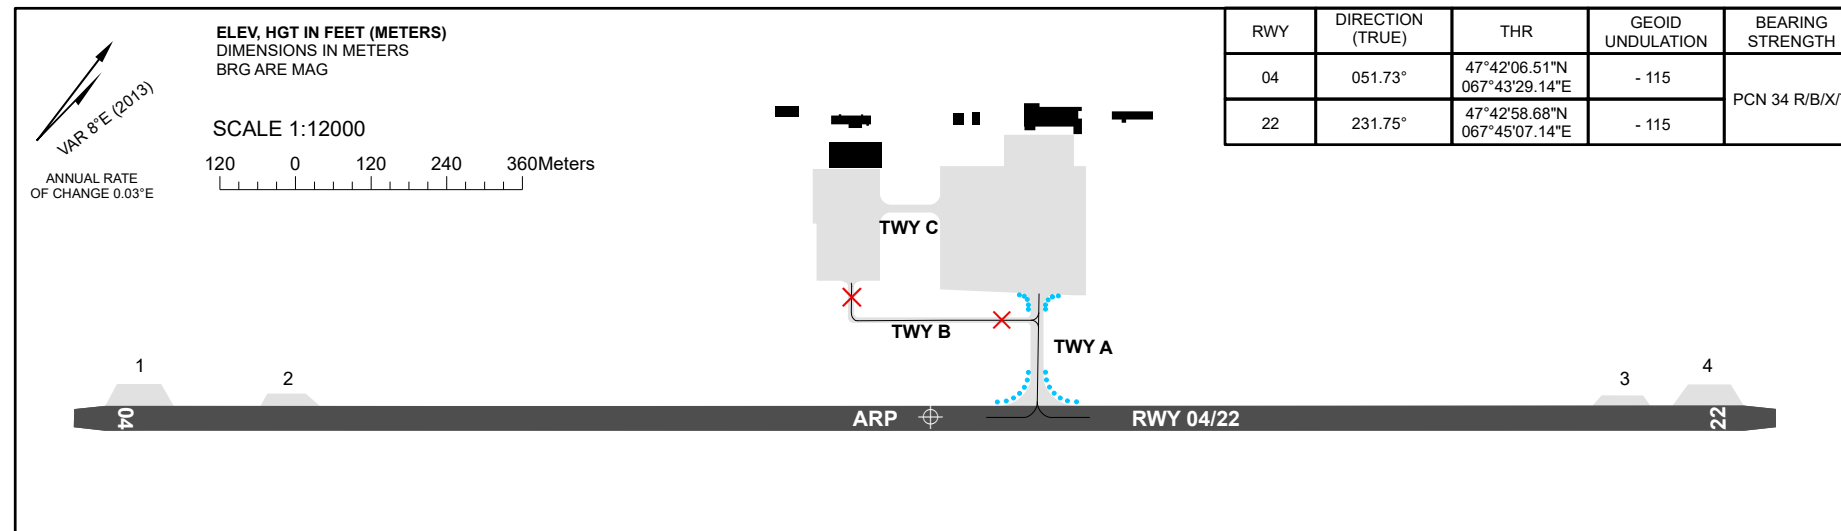

APRON	STAND	SURFACE	BEARING STRENGTH
APRON	1 - 2	CONC+ASPH	PCN 33/R/B/X/T
	3 - 7		PCN 22/F/C/X/T


TWY	WIDTH	SURFACE	BEARING STRENGTH
A	18m	CONC+ASPH	PCN 33/R/B/X/T
C	13m	ASPH	PCN 9/F/C/Y/T

STANDS	1 - 2	- for TU-154, TU-134
	3 - 7	- for AN-24, AN-26, YAK-40

CHANGE: Stand, TWY PCN.

WARNING:

1. Turning of CAT C, D ACFT on RWY turning bays № 2, 3 is prohibited
2. CAT C, D ACFT taxiing along centerline marking at the reduced speed with the crew's good look-out.
3. TWY A taxiing for ACFT IL-76T use only inner engines.

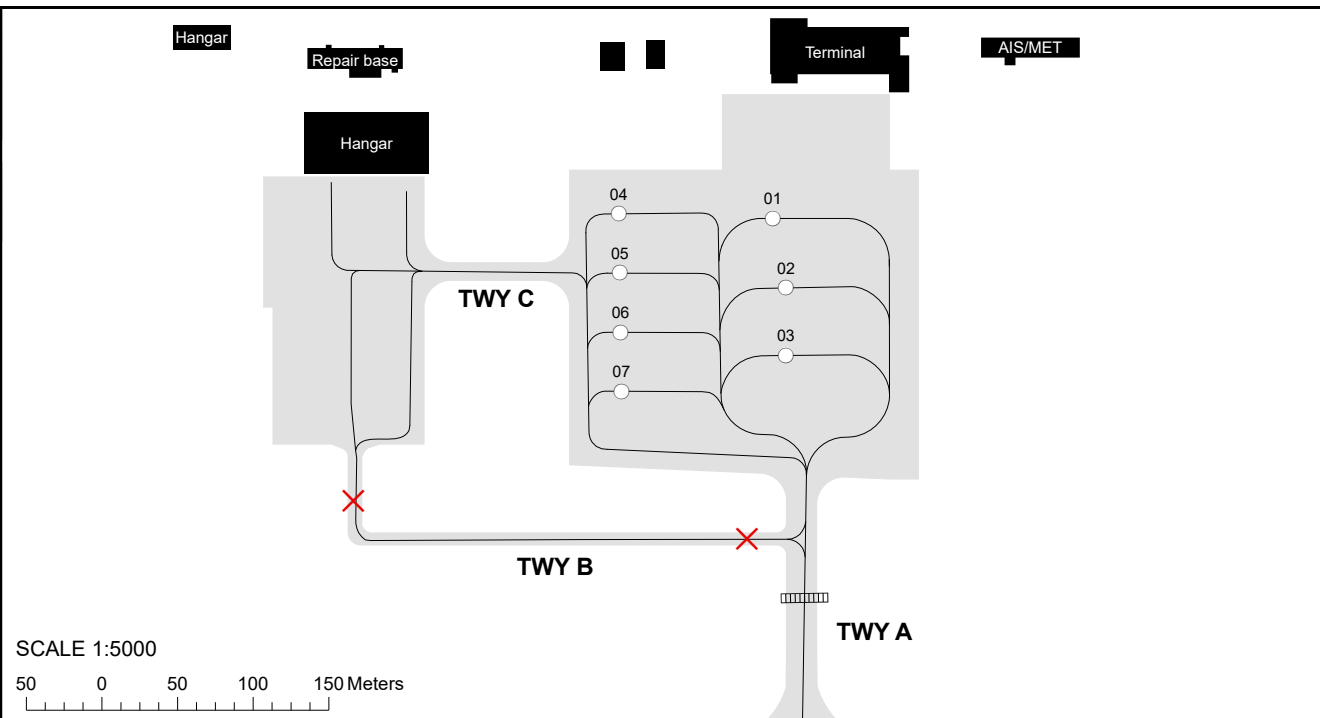

ZHEZKAZGAN

STANDS CHARACTERISTICS

Apron	Stand	Coordinates	
		Latitude	Longitude
	1	47 42 45.16 N	067 44 13.22 E
	2	47 42 44.16 N	067 44 14.92 E
	3	47 42 43.03 N	067 44 16.24 E
	4	47 42 43.19 N	067 44 09.30 E
	5	47 42 42.21 N	067 44 10.49 E
	6	47 42 41.22 N	067 44 11.67 E
	7	47 42 40.24 N	067 44 12.85 E