

STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO


TRANSITION ALTITUDE  
10000 FT

SHYMKENT TOWER 125.9  
SHYMKENT ATIS (EN) 119.2  
SHYMKENT ATIS (RU) 126.6

ADESA 1E, BAMUT 1E,  
BARAR 1E, DOSOR 1E,  
KOLAM 1E, TULGA 1E.

SHYMKENT  
RWY 10

CHANGE: Editorial, BAMUT coord.

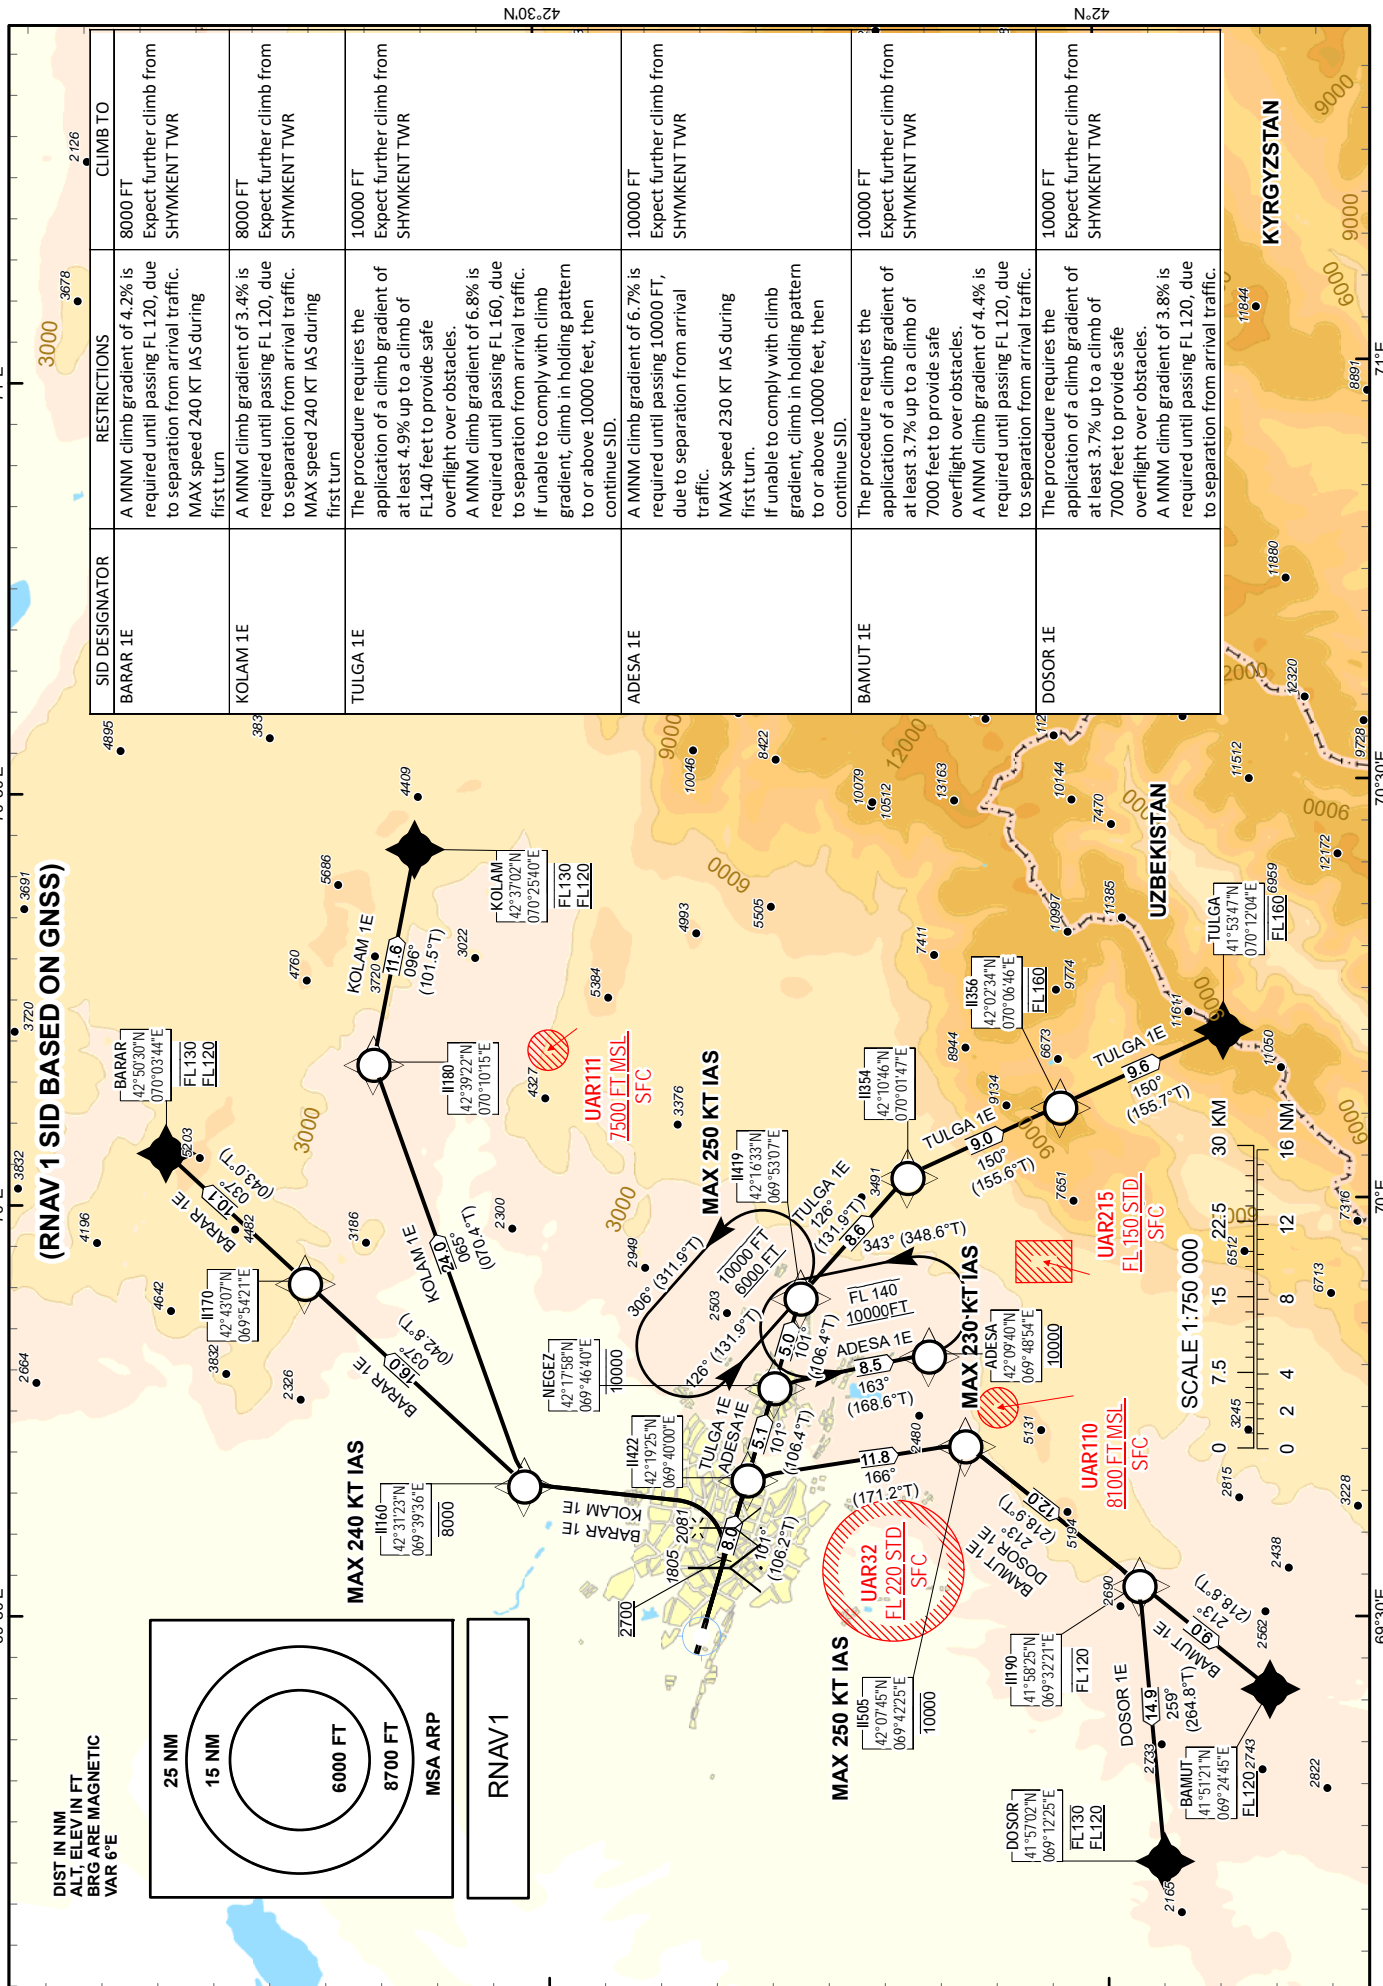

TABULAR DESCRIPTION

ADESA 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
010	CF	II422	-	101(106.2)	+5.5	8.0	-	-		-	RNAV 1
020	TF	NEGEZ	-	101(106.4)	+5.5	5.1	-	-10000		-	RNAV 1
030	TF	ADESA	-	163(168.6)	+5.5	8.5	R	+10000	-230	3.8	RNAV 1
BAMUT 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
010	CF	II422	-	101(106.2)	+5.5	8.0	-	-		-	RNAV 1
020	TF	II505	-	166(171.2)	+5.5	11.8	R	-10000	-250	-	RNAV 1
030	TF	II190	-	213(218.9)	+5.5	12.0	R	-FL120		-	RNAV 1
040	TF	BAMUT	-	213(218.8)	+5.5	9.0	-	+FL 120		2.5	RNAV 1
BARAR 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
010	CA	-	-	101(106.2)	+5.5	-	-	@2700		-	RNAV 1
020	DF	II160	-	-	+5.5	-	L	-8000	-240	-	RNAV 1
030	TF	II170	-	037(042.8)	+5.5	16.0	R	-		-	RNAV 1
040	TF	BARAR	-	037(043.0)	+5.5	10.1	-	+FL 120 -FL130		2.4	RNAV 1
DOSOR 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
010	CF	II422	-	101(106.2)	+5.5	8.0	-	-		-	RNAV 1
020	TF	II505	-	166(171.2)	+5.5	11.8	R	-10000	-250	-	RNAV 1
030	TF	II190	-	213(218.9)	+5.5	12.0	R	-FL120		-	RNAV 1
040	TF	DOSOR	-	259(264.8)	+5.5	14.9	R	+FL 120 -FL130		2.2	RNAV 1
KOLAM 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
010	CA	-	-	101(106.2)	+5.5	-	-	@2700		-	RNAV 1
020	DF	II160	-	-	+5.5	-	L	-8000	-240	-	RNAV 1
030	TF	II180	-	065(070.4)	+5.5	24.0	R	-		-	RNAV 1
040	TF	KOLAM	-	096(101.5)	+5.5	11.6	R	+FL 120 -FL130		1.9	RNAV 1
TULGA 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
010	CF	II422	-	101(106.2)	+5.5	8.0	-	-		-	RNAV 1
020	TF	NEGEZ	-	101(106.4)	+5.5	5.1	-	-10000		-	RNAV 1
030	TF	II419	-	101(106.4)	+5.5	5.0	-	-	-250	-	RNAV 1
040	TF	II354	-	126(131.9)	+5.5	8.6	R	-		-	RNAV 1
050	TF	II356	-	150(155.6)	+5.5	9.0	R	@FL 160		3.8	RNAV 1
060	TF	TULGA	-	150(155.7)	+5.5	9.6	-	@FL 160		-	RNAV 1

WAYPOINT LIST

WPT	COORD	
ADESA	420940.00N	0694854.00E
BAMUT	415121.00N	0692445.00E
BARAR	425030.00N	0700344.00E
DEP	422139.35N	0692940.74E
DOSOR	415702.00N	0691225.00E
II160	423123.34N	0693935.94E
II170	424306.51N	0695421.39E
II180	423921.61N	0701014.79E
II190	415825.28N	0693220.80E
II354	421046.05N	0700146.68E
II356	420233.83N	0700645.62E
II419	421632.68N	0695307.16E
II422	421924.93N	0694000.30E
II505	420744.57N	0694225.35E
KOLAM	423702.00N	0702540.00E
NEGEZ	421757.76N	0694639.56E
TULGA	415347.00N	0701204.00E