


STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION ALTITUDE  
10000 FT

SHYMKENT TOWER 125.9  
SHYMKENT ATIS (EN) 119.2  
SHYMKENT ATIS (RU) 126.6

ADESA 1F, BARAR 1F,  
KOLAM 1F/1R, TULGA 1F

SHYMKENT  
RWY 28

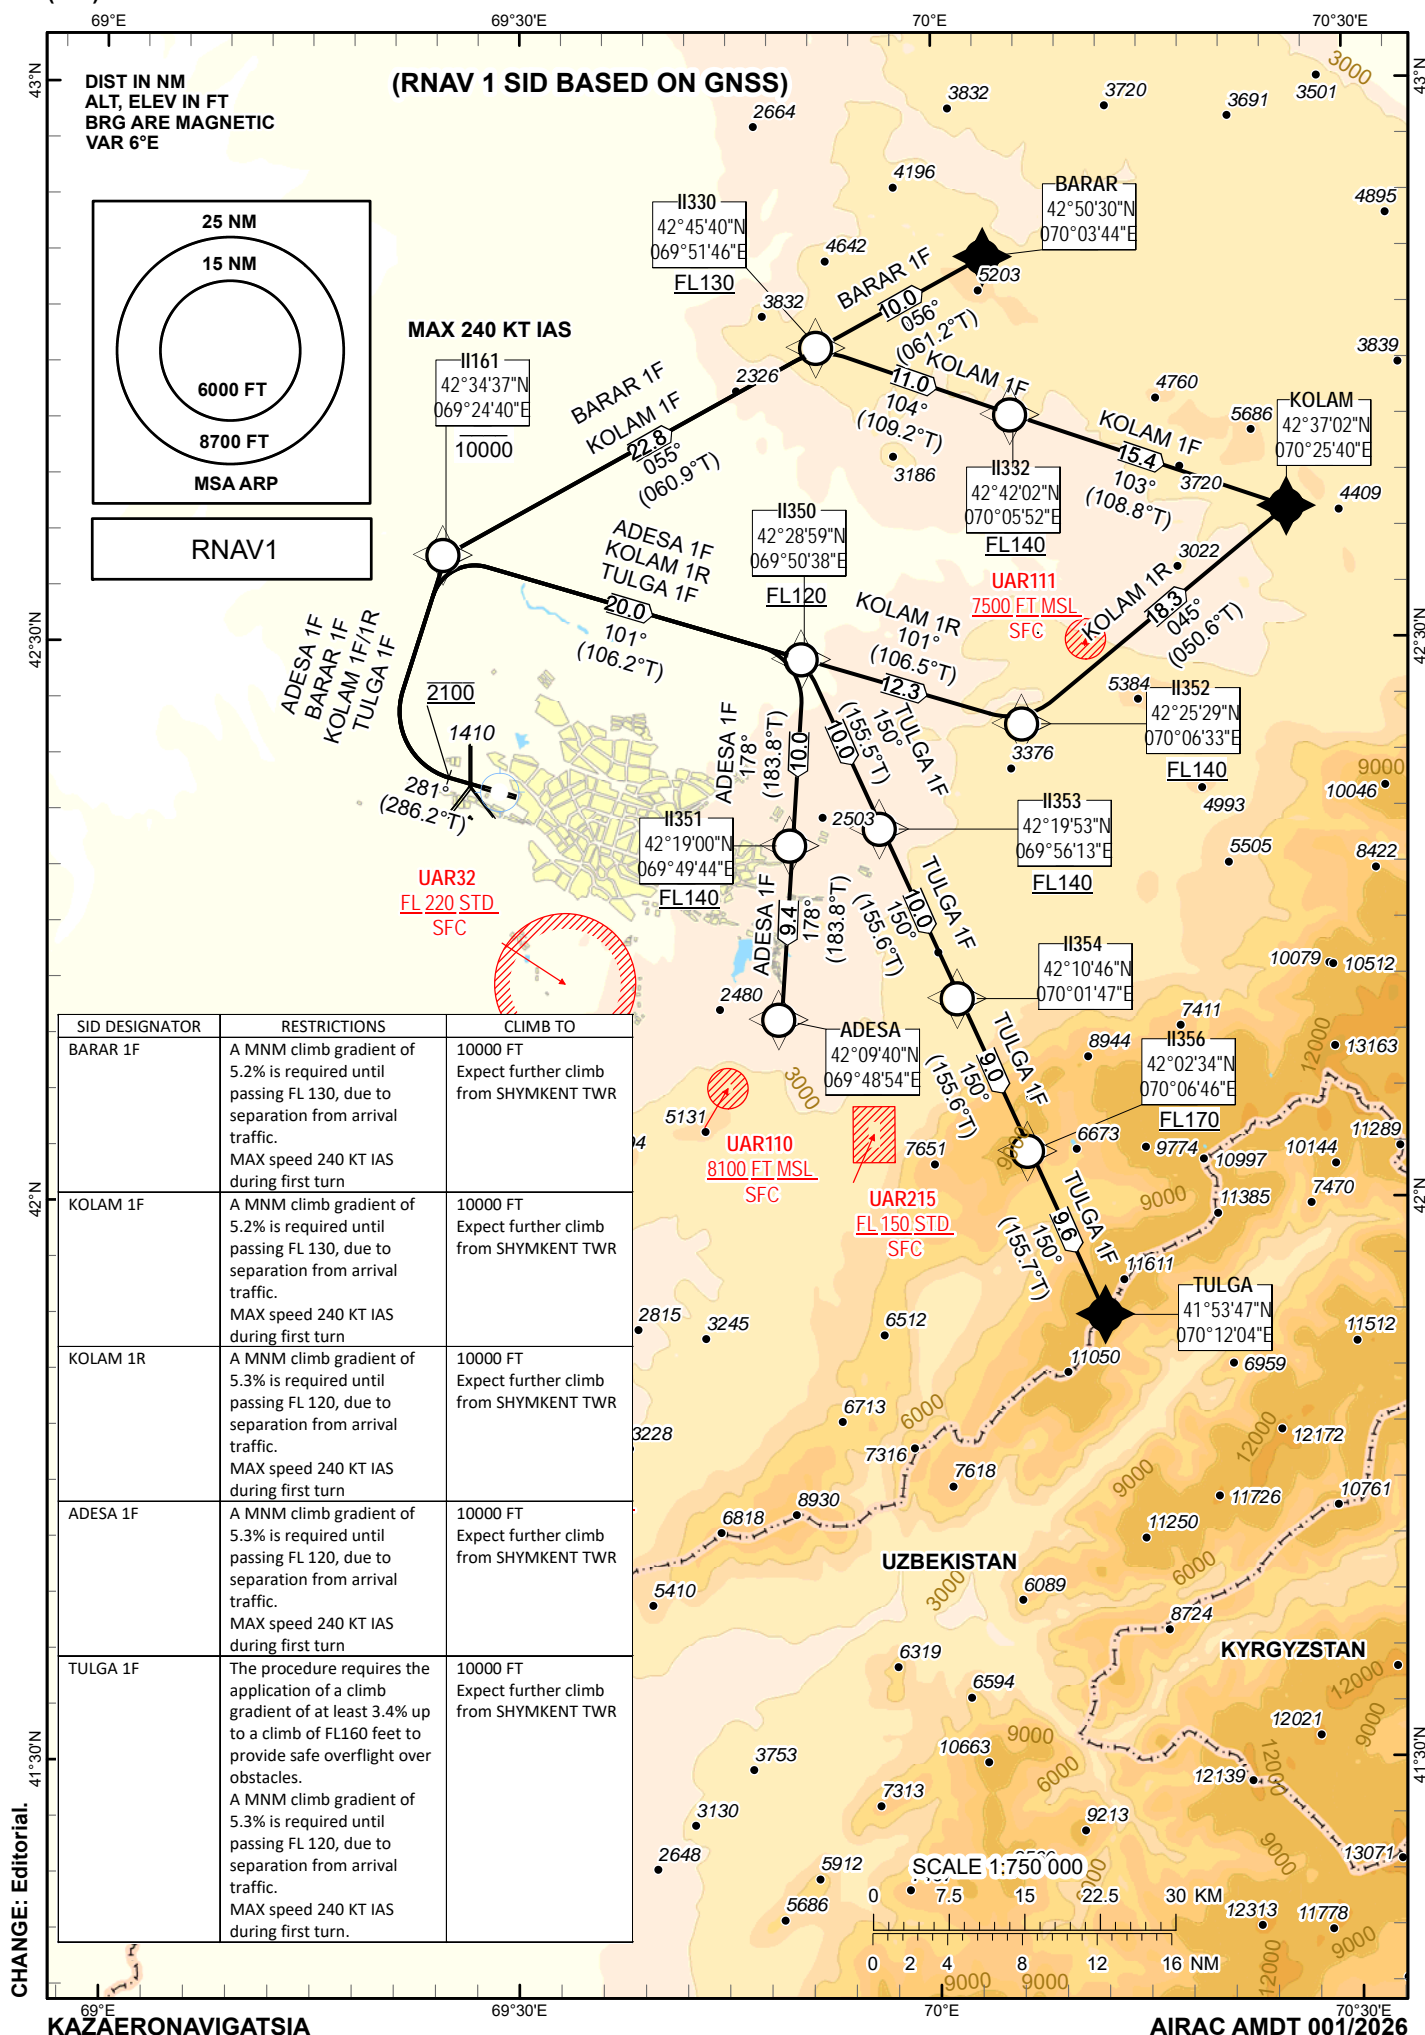

TABULAR DESCRIPTION

ADESA 1F											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
10	CA	-	-	281(286.2)	+5.5	-	-	@2100	-	-	RNAV 1
20	DF	II161	-	-	+5.5	-	R	-10000	-240	-	RNAV 1
30	TF	II350	-	101(106.2)	+5.5	20.0	R	+FL120	-	3	RNAV 1
40	TF	II351	-	178(183.8)	+5.5	10.0	R	+FL140	-	2	RNAV 1
50	TF	ADESA	-	178(183.8)	+5.5	9.4	-	-	-	-	RNAV 1
BARAR 1F											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
10	CA	-	-	281(286.2)	+5.5	-	-	@2100	-	-	RNAV 1
20	DF	II161	-	-	+5.5	-	R	-10000	-240	-	RNAV 1
30	TF	II330	-	055(060.9)	+5.5	22.8	R	+FL130	-	2.8	RNAV 1
40	TF	BARAR	-	056(061.2)	+5.5	10.0	-	-	-	-	RNAV 1
KOLAM 1F											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
10	CA	-	-	281(286.2)	+5.5	-	-	@2100	-	-	RNAV 1
20	DF	II161	-	-	+5.5	-	R	-10000	-240	-	RNAV 1
30	TF	II330	-	055(060.9)	+5.5	22.8	R	+FL130	-	2.8	RNAV 1
40	TF	II332	-	104(109.2)	+5.5	11.0	R	+FL140	-	0.9	RNAV 1
50	TF	KOLAM	-	103(108.8)	+5.5	15.4	-	-	-	-	RNAV 1
KOLAM 1R											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
10	CA	-	-	281(286.2)	+5.5	-	-	@2100	-	-	RNAV 1
20	DF	II161	-	-	+5.5	-	R	-10000	-240	-	RNAV 1
30	TF	II350	-	101(106.2)	+5.5	20.0	R	+FL120	-	2.9	RNAV 1
40	TF	II352	-	101(106.5)	+5.5	12.3	-	+FL140	-	-	RNAV 1
50	TF	KOLAM	-	045(050.6)	+5.5	18.3	L	-	-	-	RNAV 1
TULGA 1F											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	VPA (°)	Navigation Specification
10	CA	-	-	281(286.2)	+5.5	-	-	@2100	-	-	RNAV 1
20	DF	II161	-	-	+5.5	-	R	-10000	-240	-	RNAV 1
30	TF	II350	-	101(106.2)	+5.5	20.0	R	+FL120	-	3	RNAV 1
40	TF	II353	-	150(155.5)	+5.5	10.0	R	+FL140	-	1.9	RNAV 1
50	TF	II354	-	150(155.6)	+5.5	10.0	-	-	-	-	RNAV 1
60	TF	II356	-	150(155.6)	+5.5	9.0	-	+FL170	-	1.5	RNAV 1
70	TF	TULGA	-	150(155.7)	+5.5	9.6	-	-	-	-	RNAV 1

WAYPOINT LIST

WPT	COORD	
ADESA	420940.00N	0694854.00E
BARAR	425030.00N	0700344.00E
DEP	422210.61N	0692715.98E
II161	423436.62N	0692440.23E
II330	424540.36N	0695146.32E
II332	424202.48N	0700551.67E
II350	422859.07N	0695037.73E
II351	421900.18N	0694944.00E
II352	422528.58N	0700633.27E
II353	421952.70N	0695613.01E
II354	421046.05N	0700146.68E
II356	420233.83N	0700645.62E
KOLAM	423702.00N	0702540.00E
TULGA	415347.00N	0701204.00E